




TECNOFRIAS, S.L.



Expositor refrigerado ERV 15 II

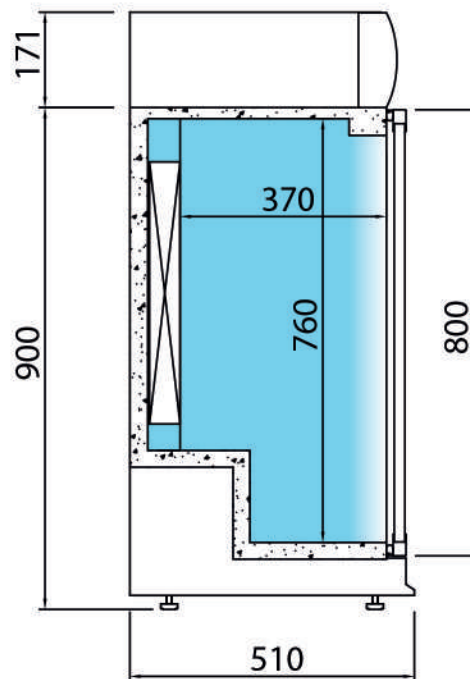



Expositor refrigerado ERV 15 II

EXTERIOR

- Acero plastificado negro

INTERIOR

- Acero plastificado gris
- Iluminación interior
- Parrillas de alambre de acero plastificado, regulables en altura y fácilmente desmontables

AISLAMIENTO

- Poliuretano inyectado alta presión libre de CFC's densidad 40 kg/m³, bajo GWP y cero efecto ODP

PUERTAS

- Puertas con doble acristalamiento (6-10-4)
- Cerradura incorporada
- Burete fácilmente sustituible
- Puertas con tirador integrado

REFRIGERACIÓN

- Sistema de condensación ventilada INFRICOOL
- Evaporadores tratados anticorrosión 100% Poliéster
- Bandeja evaporativa

OPCIONAL / OPTIONAL

- Iluminación LED / LED lighting

EXTERIOR

- Black plastic coated steel

INTERIOR

- Grey plastic coated steel
- Interior lighting
- Plastic coated wire shelves, adjustable height and easy removal

INSULATION

- Free CFC's high density (40kg/m³) polyurethane insulation with low GWP & zero ODP effect

DOORS

- Doors with double glass. (6-10-4)
- Integrated lock
- Easy removal gasket
- Integrated handle doors

REFRIGERATION

- Forced air refrigeration system
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Evaporative tray

MODELOS MODELS	→ ↗ ↑	⏻	⚠	📦	🚪	📊	🔧	❄️	💧	🌡️	🔧	📺	🌡️
	Dimensiones Dimensions LxPxH (mm)	Potencia Power (W)	Tensión/Frecuencia Electrical (V/Hz)	Capacidad Capacity (L)	Nº puertas Doors	Nº parrillas/l. guías No shelves / Slides	Compresor Compressor (HP)	Potencia Frig. Cooling capacity (W) (T _{amb} -T _{0C})	Evaporación Evaporation	Régimen temperatura Temperature range (32°C)	Desescarche Defrost	Control Control	Refrigerante Coolant
ERV 15 II	600x510x920	325	220/50	140	1	2	1/6	178	Forzada Forced	+4°C/+12°C	Automático Automatic	Digital	R 134 a