


## Expositor refrigerado vertical ERV 83



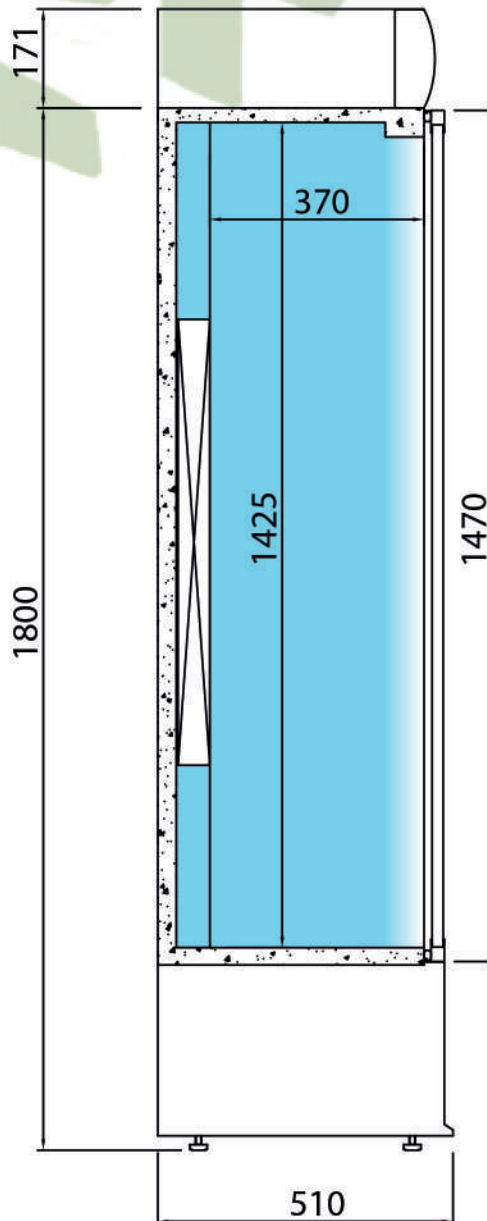

## Expositor refrigerado vertical ERV 83

### EXTERIOR

- Acero plastificado negro

### INTERIOR

- Acero plastificado gris
- Iluminación interior
- Parrillas de alambre de acero plastificado, regulables en altura y fácilmente desmontables

### AISLAMIENTO

- Poliuretano inyectado alta presión libre de CFC's densidad 40 kg/m<sup>3</sup>, bajo GWP y cero efecto ODP

### PUERTAS

- Puertas con doble acristalamiento (6-10-4)
- Cerradura incorporada
- Burlete fácilmente sustituible
- Puertas con tirador integrado

### REFRIGERACIÓN

- Sistema de condensación ventilada
- Evaporadores tratados anticorrosión 100% Poliéster
- Bandeja evaporativa

### OPCIONAL / OPTIONAL

- Parrillas / Wire shelves ERV 53 (502X27)
- Parrillas / Wire shelves ERV 83 (502X28)
- Cabeza iluminativa / Illuminated head ERV 53 (CPERV15)
- Cabeza iluminativa / Illuminated head ERV 83 (CPERV25)

### EXTERIOR

- Black plastic coated steel

### INTERIOR

- Grey plastic coated steel
- Interior lighting
- Plastic coated wire shelves, adjustable height and easy removal

### INSULATION

- Free CFC's high density (40kg/m<sup>3</sup>) polyurethane insulation with low GWP & zero ODP effect

### DOORS

- Doors with double glass. (6-10-4)
- Integrated lock
- Easy removal gasket
- Integrated handle doors

### REFRIGERATION

- Forced air refrigeration system
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Evaporative tray

| MODELOS<br>MODELS | →                                       | ↗                        | ↑  | ⏻                            | ⚠                   | 📦  | 📱                               | 📊  | 🔧                          | ❄  | 💧                       | 🗣                  | 🔊                       | 🔧 | 🌡 |
|-------------------|---|--------------------------|--|------------------------------|---------------------|--|---------------------------------|--|----------------------------|--|-------------------------|--------------------|-------------------------|---|---|
|                   | Dimensiones<br>Dimensions<br>LxWxH (mm) | Potencia<br>Power<br>(W) | Tensión/Frecuencia<br>Electrical<br>(V/Hz) | Capacidad<br>Capacity<br>(L) | Nº puertas<br>Doors | Nº parrillas/slides<br>No shelves / Slides | Compresor<br>Compressor<br>(HP) | Potencia Frig.<br>Cooling<br>capacity<br>(W) (T <sup>18</sup> -10°C) | Evaporación<br>Evaporation | Régimen temperatura<br>Temperature range<br>(32°C) | Desescarche<br>Defrost  | Control<br>Control | Refrigerante<br>Coolant |   |   |
| ERV 83            | 900x510x1820                            | 600                      | 220/50                                     | 435                          | 2                   | 5  | 3/8                             | 464  | Forzada<br>Forced          | +4°C/+12°C   | Automático<br>Automatic | Digital            | R 134 a                 |   |   |